



DR335 - DR445

Stack tumble dryers

**INDUSTRIAL
BY DESIGN**

Features

- Double capacity in same floor space
- Extra large cylinder capacity
- Large door opening for easy loading and unloading
- Standard galvanized drum
 - oval drum holes preventing damage from standard drywall screws
- Unique suspension system
 - at the rear: bearing
 - at the front: rubber rolls with bearings
- Large lint filter
 - easy removal of lint
 - efficient drying
 - self cleaning filter
- Axial airflow
 - drum perforations only at the front and back
 - maximum airflow, less energy consumption and short drying times
- DX4 control
 - easy to use and flexible microprocessor control
 - 3 freely adaptable programs
 - temperature can be freely programmed per degree, drying and cool-down times easily programmable

Options

- OPTimum control (over-dry prevention technology)
 - easy to operate, easy to program
 - 30 programmable cycles
 - 3 cycle types
 - Time Dry: programmable time and temperature
 - Auto Dry: 11 programmable automatic dryness levels and programmable temperature
 - Moisture Dry: will dry to the programmed moisture level at programmed temperature
- Coin-operated version for vended laundry applications




OPTIONAL

DR335 - DR445

TYPE		DR335	DR445
capacity 25:1	kg	2 x 12	2 x 16,8
capacity 20:1	kg	2 x 15	2 x 21
DRUM			
volume	l	301	2 x 421
diameter	mm	762	838
depth	mm	660	762
door opening diameter	mm	576	683
temperature min	°C	38	38
temperature max	°C	88	88
POWER MOTOR NON-REVERSING			
drum	kW	0,19	0,37
fan	kW	0,19	0,37
exhaust flow rate (50Hz)	l/s	160	236
diameter	mm	203 **	254
POWER			
electric heating	kW	2 x 21	-
gas heating	Btu/h	73.000	87.000
gas heating	kcal	18.390	21.924
steam heating			
@ 6,9 bar	Btu/h / kW	111.000 / 32,5	-
@ 1,0 bar	Btu/h / kW	74.000 / 21,7	-
steam connection inlet		3/4"	-
steam connection outlet		3/4"	-
gas connection		1/2" **	1/2" **
gas connection - pressure NG/LP	mb	20 / 28,37	-
noise level	dBA	66	67
TRANSPORT DATA			
dimensions (H x W x D)	mm	1937 x 800 x 1086	2064 x 876 x 1235
net weight	kg	247	305
packing dimensions (HxWxD)	mm	2057 x 825 x 1194	2159 x 902 x 1372
gross weight	kg	264	326
AVAILABLE CONTROLS			
DX4 (coin or OPL)		standard	standard
OPTimum (OPL only)		optional	optional

(**) Single gas inlet & elliptical exhaust

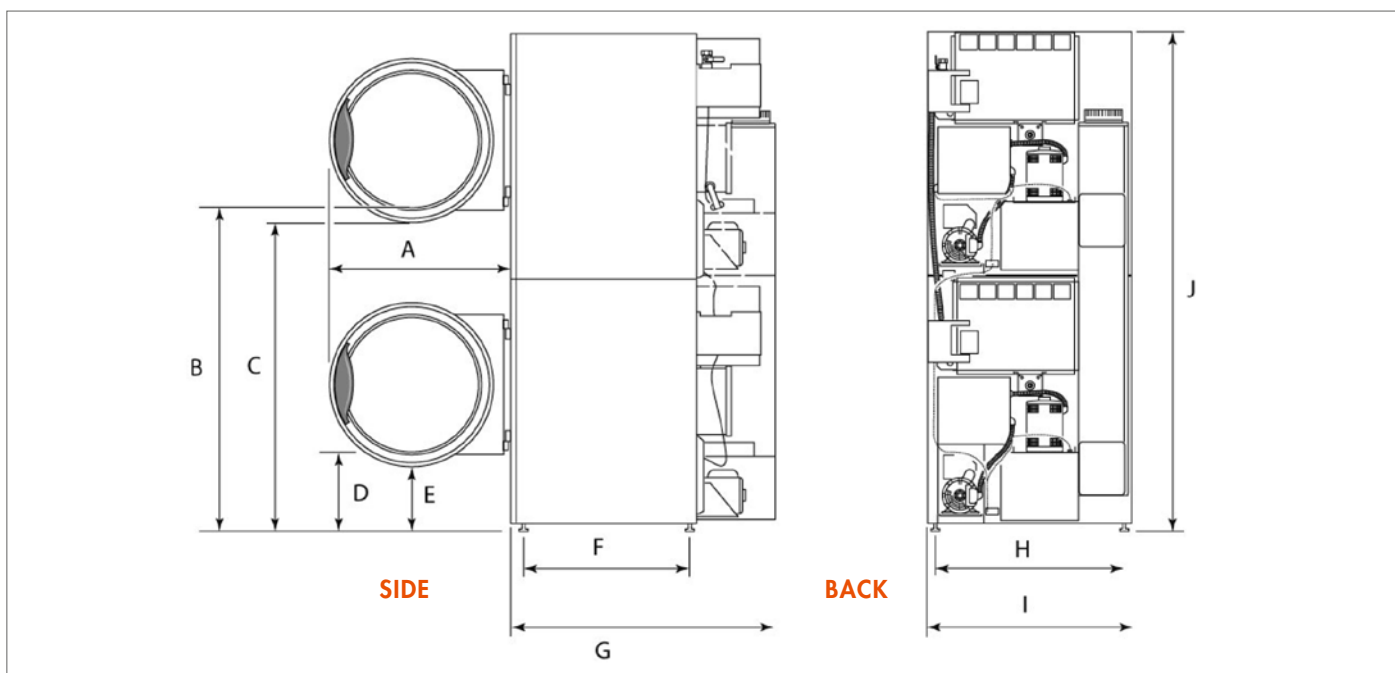

DIMENSIONS

	A	B	C	D	E	F	G	H	I	J
DR335	711	1245	1226	290	272	636	1086	695	800	1937
DR445	810	1280	1252	262	236	746	1235	775	876	2064