



## TS 93 E

### *Drying Cabinet with a Large Capacity*

ProLine TS 93 E, has the capacity to dry great amounts of laundry in a very short time and is ideal for drying rugs or larger textiles such as sheets, curtains etc.

The drying cabinet is energy efficient. The energy consumption is only 6,4 kWh.

ProLine TS 93 E is equipped with the Humidity Tracking System (HTS). HTS measures the level of humidity every single second, to determine exactly when the textiles are dry. ProLine TS 93 E has four automatic programs and one program for timed drying.

### *Details*

- Capacity 16 kg (35,3 lbs)
- Hanging length 32 m (105 ft)
- Width, 180 cm (71 inch)
- HTS - Humidity Tracking System
- Gentle drying mode
- Four automatic programs and one program for timed drying
- Hanging rail rotates out 90° and doors open 190°
- Double overheat protection for increased security
- Removable top panel for easy installation/handling
- Choose between Swedish, English, Norwegian, Danish, French, German and Spanish display texts
- Delivered as an assembling kit

Main Data	TS 93 E
Capacity, kg (lbs)	16 (35,3)
Hanging length, m (ft)	32 (105)
Heating effect, kW	9,0
Part no	131034
Consumption data, normal temperature*	
Drying time, min	64
Energy consumption, kWh	6,4
Drying capacity, g/min (oz/min)	81 (2,9)

\*Drying of 12 kg cotton (dry weight), washed and high-spinned to 43% residual moisture, dried to 0% residual moisture.

### *About PODAB*

PODAB is a Swedish company that has been in the laundry business since 1945. We develop, manufacture and market quality products at competitive prices for multiple apartment buildings, laundry rooms and for professional use.

### *Contact us*

PODAB's head office, warehouse, workshop and export department are situated in Gothenburg, Sweden. If you have any questions, please feel free to contact us at +46 31-752 01 00. You can also read more about us at [www.podab.com](http://www.podab.com).


Drying Cabinet		TS 93 E
<b>Electrical connections</b>	Phase/Voltage/Frequency	3~N/400V/50Hz
	Total effect, kW	9,5
	Fuse, A	16
	Cable length, mm (inch)	2500 (98,4)
<b>Air connections</b>	Outlet exhaust, $\varnothing$ mm (inch)	160 (6,3)
	Outlet air flow, m <sup>3</sup> /h* (ft <sup>3</sup> /h*)	300 (10594)
	Pressure drop, max Pa* (psf*)	260 (5,43)
<b>Optional extras</b>	Single bar, art no	131072
	Hook rack, set of three, part no	131071
	Air exchanger 1 vent., part no	141009
	Air exchanger 2 vent., part no	141018
<b>Sound level</b>	Airborne sound level, dB(A)	65
<b>Weight</b>	Net, kg (lbs)	235 (518)
	Shipping data net, kg (lbs)	275 (606)
<b>Minimum ceiling height</b>	Minimum ceiling height, mm (inch)	2215 (87,2)
<b>Shipping dimensions</b>	WxDxH packed, mm (inch)	1915x790x1060 (75,4x31,1x41,7)

\* Recommended air flow.

Front

Left side

From above

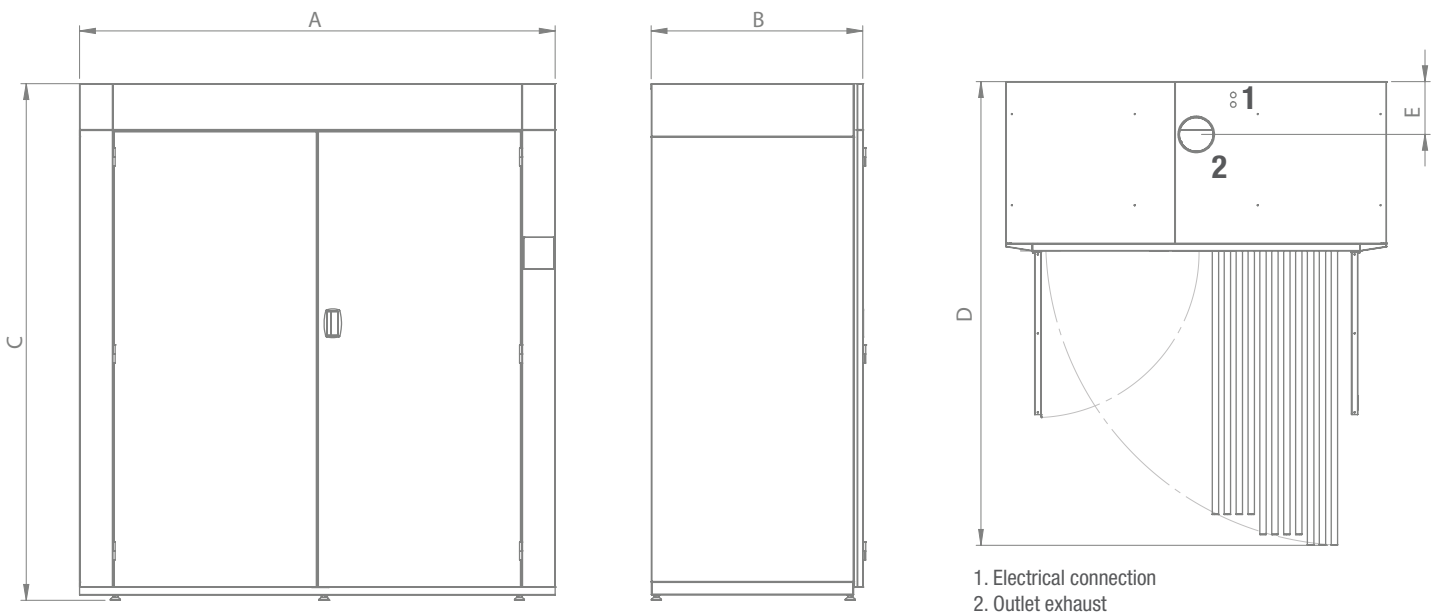

Dimensions in mm (inch)	A	B	C	D	E
	Width	Depth	Height	Depth with hanging rail	Exhaust position from back
TS 93 E	1800 (71)	800 (31,5)	1955 (77)	2192 (204)	250 (9,84)



2015-11-30. Changes can be made without prior notice.